

## Jig Saw P1 cc MaxiMAX case in the T-MAX

ref.no.: 917103

EAN: 4032689172767

► Transport and storage box T-MAX




### Technical data

Stroke height	1 Inch
No-load number of strokes	800-3000 1/min
Nominal power input	1.2 hp
Weight	5.5 lbs
Universal motor	230 V / 50 Hz

### Delivery specification

- 3 jig saw blades CUnex W1, W2, W+P2
- 1 Parallel guide fence P1-PA; Ref. No. 205448
- 1 base plate P1-GP; Ref. No. 204350
- 1 hose connector P1-AS; Ref. No. 203917
- 1 chip deflector P1-SA; Ref. No. 204353
- 1 splinter guard P1-SS; Ref. No. 205447
- 1 glider P1-G; Ref. No. 205464
- 1 Mains cable 4 m (13.1 ft)

## Examples for usage

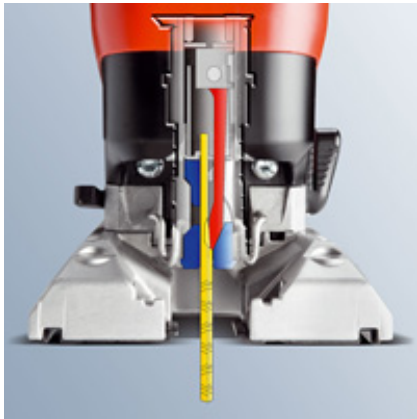

Innovative CUMax sawblade clamping ensures a positive fit because of a wedge pushing against the blade. This design reliably fastens the sawblade so that it cannot be displaced.



In order not to compromise the strength of the standard sole plate, a separate tilting plate was developed for the P1 cc.



The CUnex W1 consists of two separate, soldered sawblades. The blade's strength and wedge shape ensure precise and square sawing, even when cutting curves.



If exactly straight cuts are required, the P1 cc can be used in conjunction with the MAFELL F guide rail.

## Applications

---

- ▶ Straight cuts with guide rail and CUnex
- ▶ Guided circle cutting with P1-PA parallel fence and CUnex
- ▶ Recesses
- ▶ Bevel cuts up to 45°
- ▶ Compatible materials depend on sawblade; see special accessories/tools

## Advantages

---

- ▶ The iF Product Design Award 2011 for the Jig Saw P1 cc.
- ▶ To change the sawblade, simply release the locking lever. With just one hand, effortlessly remove the blade and insert the replacement.
- ▶ The high-performance CUprex compact motor delivers consistently high speeds, even when executing long cuts.
- ▶ The vacuum channel integrated in the sole plate guarantees outstanding dust extraction directly alongside the sawblade.

## Description

---

Owing to its ergonomic design, with low center of pressure and soft pads, the P1 cc is comfortable to hold in every situation.

































Sophisticated self-extraction and a clever integrated blower keep the work surface free from chips, even if a dust extractor is not connected. The workplace therefore remains clean at all times.

The P1 cc offers continuously variable speeds in the range 800 to 3000 strokes/min., so that the output can be adjusted exactly to suit the material.

The sole plate, with integrated vacuum channel, is as sturdy as it looks. By way of a quick-release mechanism, it remains reliably fastened to the saw at an exact right angle.

Its intelligent accessories give the P1 cc unprecedented versatility. The innovative design of the new MAFELL precision sawblade CUnex W1, in particular, facilitates extremely precise sawing.

## Accessories / Tools

	Jig saw blade CUnex W1 2 pieces		Jig saw blade W2 5 pieces
	Jig saw blade W3 5 pieces		Jig saw blade W4 5 pieces
	Jig saw blade W5 5 pieces		Jig saw blade W6 5 pieces
	Jig saw blade W+P2 5 pieces		Jig saw blade W+M2 5 pieces
	Jig saw blade L2 5 pieces		Jig saw blade M2 5 pieces
	Jig saw blade E+F2 1 piece		Assortment 1 4 x W2, W+P2, W5, W4, 2 x CUnex W1
	Assortment 2 4 x M2, W6, L2, W+M2, 2 x CUnex W1		Parallel guide fence P1-PA incl. circular cutter
	Tilting plate P1-SP tilting range +/- 45°		Splinter guard P1-SS 5 pieces
	Guide rail F 80 0,8 m (2,6 ft) long		Guide rail F 110 1.1 m (3.6 ft) long
	Guide rail F 160 1.6 m (5.2 ft) long		Guide rail F 210 2,1 m (6,9 ft) long
	Guide rail F 310 3,1 m (10,2 ft) long		Connecting piece F-VS for joining two guide rails
	Angle fence F-WA		Guide pocket F 160 for guide rails up to 1,6 m
	Guide pocket set 2 x F 160 + F-VS + 2 x F-SZ 180 MM + 1 guide pocket		Guide pocket set F 80 + F 160 + F-WA + F-VS + 2 x F-SZ 180MM + Guide pocket
	End cap F-EK 2 pieces		Non-slip profile F-HP 6,8 M 6.8 m (22.3 ft.) long
	Splinter guard F-SS 3,4M 3.4 m (11.2 ft.) long		Lever clamp F-SZ 180MM 2 pieces, for fixing guide rail to workpiece
	Suction clamping system Aeroxfix F-AF 1 with 1,3 m rail, adapters for above and underneath rail, flexible hose		Flexible hose FXS-L up to 3,2 m (10.6 ft) long

## contact

---

MAFELL AG

Beffendorfer Straße 4  
D-78727 Oberndorf / Neckar  
Germany

Tel.: +49 7423 / 812-114  
Fax: +49 7423 812-102  
Email: [export@mafell.de](mailto:export@mafell.de)