

## Cordless Drill Driver A 18 M bl PURE in the T-MAX



ref.no.: 91A002

EAN: 4032689195896

► Transport and storage box T-MAX



### Technical data

|                                        |                    |
|----------------------------------------|--------------------|
| Collar diameter                        | 1 11/16 Inch       |
| Chuck capacity                         | 1/2 Inch           |
| Max. drilling diameter in wood / steel | 1 15/16 / 1/2 Inch |
| Torque soft / hard                     | 44 / 90 Nm         |
| Impulse torque (soft)                  | 49 Nm              |
| 1st speed range                        | 0 - 600 1/min      |
| 2nd speed range                        | 0 - 2050 1/min     |
| Weight (including battery)             | 3.7 lbs            |
| Nominal voltage                        | 18 V               |
| Torque settings                        | 11                 |

### Delivery specification

- 1 Quick-release chuck A-SBF 13; Ref. No. 206772
- 1 Quick-release bit holder A-SBH; Ref. No. 206766
- 1 Belt clip
- 1 Auxiliary handle
- 1 Bit PZ 2


## Examples for usage



This product is part of the Cordless Alliance System. CAS means: One battery, many solutions. 100% compatibility of machines, battery packs and chargers!



Swap the bit holder, chuck and angle head in a matter of seconds – it's easy with the clever quick-release system. Pull out, insert, ready to go.

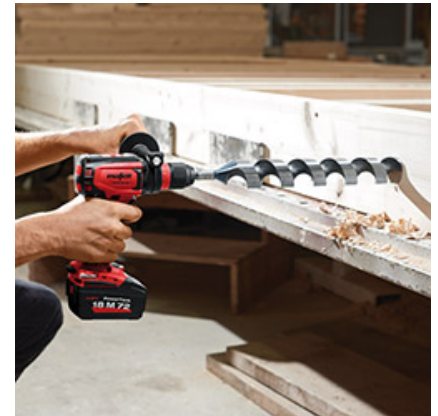

Drilling in wood with a 50 mm Lewis auger bit? Not a problem for the A 18 M bl and ASB 18 M bl with auxiliary handle.



The battery permanently displays its exact charge, even when it is detached.

## Applications

---

- ▶ Drilling
- ▶ Driving
- ▶ Ideal for construction sites

## Advantages

---

- ▶ The convenient function switch on the top of the cordless drill driver selects the drilling, driving and impulse modes.
- ▶ The maintenance-free brushless motor ensures a long service life and, thanks to its high efficiency, makes best possible use of the battery capacity.
- ▶ With two bit holders on each side of the machine, the desired bit is always to hand.
- ▶ Spindle with 1/4" chuck directly accommodates bits and push-fit accessories.
- ▶ 43 mm diameter clamping collar fits all MAFELL BST drilling stations.
- ▶ Bright LEDs illuminate a large working area.

## Description

---

Powerful, user-friendly, tough, resilient – MAFELL's new, high-output cordless drill drivers enhance the pleasure of doing a good job.

The large torque range gives access to extremely high twisting forces. Screws can be tightened carefully in a wide range of applications – with the appropriate torque selected, even large screws can be used.

Tool-free quick-release system for speed and efficiency when alternating between drilling and driving.

The selectable impulse mode comes to the fore when confronted with immovable screws.

Thanks to the practical belt clip, the cordless drill driver is always within reach. It can be attached to the left or right of the machine without any tools.

The battery PowerTanks feature process-controlled technology.

All the relevant factors, including the individual cell state, air cooling and cell temperature are monitored. In addition, the floating battery cells are protected against mechanical influences.

## Accessories / Tools



**Quick-release chuck A-SBF 13**  
13 mm (1/2 in.)



**Angle head A-WV 18**  
up to 100 Nm



**Battery PowerTanks 18 M 72 LiHD**  
Li-Ion, 18V, 72 Wh (LiHD)



**Lewis auger bit with hexagonal shank**  
Ø 12 mm (1/2 in.), total length 650 mm (25 9/16 in.)



**Lewis auger bit with hexagonal shank**  
Ø 16 mm (5/8 in.), total length 650 mm (25 9/16 in.)



**Lewis auger bit with hexagonal shank**  
Ø 20 mm (13/16 in.), total length 650 mm (25 9/16 in.)



**Lewis auger bit with hexagonal shank**  
Ø 24 mm (15/16 in.), total length 650 mm (25 9/16 in.)



**Lewis auger bit with hexagonal shank**  
Ø 28 mm (1 1/8 in.), total length 650 mm (25 9/16 in.)



**Lewis auger bit with hexagonal shank**  
Ø 8 mm (5/16 in.), total length 460 mm (18 1/8 in.)



**Lewis auger bit with hexagonal shank**  
Ø 12 mm (1/2 in.), total length 460 mm (18 1/8 in.)



**Battery-PowerTank 18 M 99 LiHD**  
Li-Ion, 18V, 99 Wh (LiHD)



**Lewis auger bit with hexagonal shank**  
Ø 18 mm (11/16 in.), total length 460 mm (18 1/8 in.)



**Lewis auger bit with hexagonal shank**  
Ø 20 mm (13/16 in.), total length 460 mm (18 1/8 in.)



**Lewis auger bit with hexagonal shank**  
Ø 22 mm (7/8 in.), total length 460 mm (18 1/8 in.)



**Lewis auger bit with hexagonal shank**  
Ø 26 mm (1 in.), total length 460 mm (18 1/8 in.)



**Quick-release bit holder A-SBH**



**Torque head A-DMV x3**  
3:1 ratio



**Lewis auger bit with hexagonal shank**  
Ø 10 mm (3/8 in.), total length 650 mm (25 9/16 in.)



**Lewis auger bit with hexagonal shank**  
Ø 14 mm (9/16 in.), total length 650 mm (25 9/16 in.)



**Lewis auger bit with hexagonal shank**  
Ø 18 mm (11/16 in.), total length 650 mm (25 9/16 in.)



**Lewis auger bit with hexagonal shank**  
Ø 22 mm (7/8 in.), total length 650 mm (25 9/16 in.)



**Lewis auger bit with hexagonal shank**  
Ø 26 mm (1 in.), total length 650 mm (25 9/16 in.)



**Lewis auger bit with hexagonal shank**  
Ø 30 mm (1 3/16 in.), total length 650 mm (25 9/16 in.)



**Lewis auger bit with hexagonal shank**  
Ø 10 mm (3/8 in.), total length 460 mm (18 1/8 in.)



**Lewis auger bit with hexagonal shank**  
Ø 14 mm (9/16 in.), total length 460 mm (18 1/8 in.)



**Lewis auger bit with hexagonal shank**  
Ø 16 mm (5/8 in.), total length 460 mm (18 1/8 in.)



**Battery-PowerStation APS 18 M**  
18 V



**Battery-PowerStation APS 18M+**  
High-speed charger 18V



**Lewis auger bit with hexagonal shank**  
Ø 24 mm (15/16 in.), total length 460 mm (18 1/8 in.)



**Lewis auger bit with hexagonal shank**  
Ø 28 mm (1 1/8 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 30 mm (1 3/16 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 7 mm (1/4 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 9 mm (3/8 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 12 mm (1/2 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 16 mm (5/8 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 20 mm (13/16 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 24 mm (15/16 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 28 mm (1 1/8 in.), total length 320 mm (18 1/8 in.)



Case with auger bits 320  
6 pieces Lewis auger bits Ø 8, 10, 12, 14, 16, 18 mm



Case with auger bits 650  
5 pieces Lewis auger bits Ø 12, 14, 16, 18, 20 mm



Drilling station BST 460  
Drilling station BST 460 / BST 320



Drilling station BST 650 S  
Drilling station BST 650 S / BST 460 S

With stop system thanks to parallel fence (see special accessories)



Lewis auger bit with hexagonal shank  
Ø 6 mm (1/4 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 8 mm (5/16 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 10 mm (3/8 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 14 mm (9/16 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 18 mm (11/16 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 22 mm (7/8 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 26 mm (1 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank  
Ø 30 mm (1 3/16 in.), total length 320 mm (18 1/8 in.)



Case with auger bits 460  
6 pieces Lewis auger bits Ø 8, 10, 12, 14, 16, 18 mm



Drilling station BST 320  
Drilling station BST 460 / BST 320



Drilling station BST 460 S  
Drilling station BST 650 S / BST 460 S

With stop system thanks to parallel fence (see special accessories)

## contact

---

MAFELL AG

Beffendorfer Straße 4  
D-78727 Oberndorf / Neckar  
Germany

Tel.: +49 7423 / 812-114  
Fax: +49 7423 812-102  
Email: [export@mafell.de](mailto:export@mafell.de)