

Chain Mortiser LS 103 Ec without chain set - US 240 V



ref.no.: 924250

EAN: 4032689219141

▶ boxed



Technical data

| | |
|--|--------------|
| Mortising depth with chain sets 100 mm | 3 15/16 Inch |
| Mortising depth with chain sets 150 mm | 5 7/8 Inch |
| Nominal No. of strokes – no load | 4050 1/min |
| Nominal power input | 3.4 hp |
| Weight | 19.2 lbs |
| Universal motor | 240 V |

Delivery specification

- 1 Stop plate; Ref. No. 200954
- 1 Allen key 4 mm; Ref. No. 093074
- 1 Allen key 8 mm; Ref. No. 093070

Examples for usage




Tenon cuts of various sizes up to 100 mm (3 15/16 in.) with the LS 103 Ec.



The LS 103 Ec being operated horizontally.



The LS 103 Ec with the guide support stand FG 150 for mortising depths of up to 140 mm.

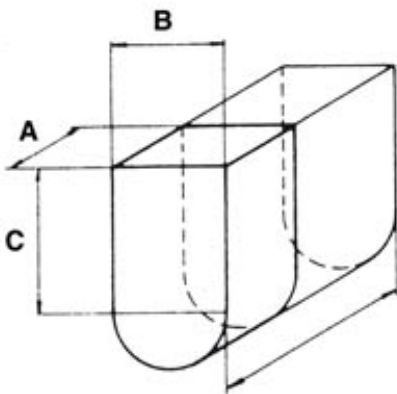

Dimensions of mortising chains
example: 28 x 40 x 100 mm; chain
width: 28 mm (1 1/8 in.); hole
width: 40 mm (1 9/16 in.);
mortising depth: 100 mm (3 15/16
in.)

Applications

- ▶ For cutting mortises
- ▶ Compatible materials include solid wood and glue-laminated timber

Advantages

- ▶ Ergonomic handle and switch arrangement – for safe, efficient, energy-saving work.
- ▶ Low machine weight – ideal for use on construction site.
- ▶ Extremely powerful motor – for high efficiency and considerable time-saving.

Description

Unique lightweight at only 8.7 kg (19.2 lbs.). Chain mortising without the drag.

The long guide plate has a large adjusting range and permits work on large timber workpieces.

The tensioning system of the LS 103 Ec allows fast chain replacement. Even retightening of the chain without removing the chain guard is quick and easy.

Optional accessories include the guide support stand for the LS 103 Ec, ideal for precise framing work, particularly indispensable for chain sets of 150 mm (5 7/8 in.)

With the LS 103 Ec and the appropriate slot mortising attachment SG 230, SG 400 or SG 500, you can execute slots of up to 500 mm (19 11/16 in.). This is not possible with any other machine on the market!

Accessories / Tools



Chain bars

28 x 40 x 100 mm (1 1/8 x 1 9/16 x 3 15/16 in.)



Chain bars

28 x 40 x 150 mm (1 1/8 x 1 9/16 x 5 7/8 in.)



Chain bars

28 x 35 x 150 mm (1 1/8 x 1 3/8 x 5 7/8 in.)



Mortising chain

pitch 22.6, 28 x 35 x 100 mm (1 1/8 x 1 3/8 x 3 5/16 in.)



Mortising chain

pitch 22.6, 28 x 40 x 150 mm (1 1/8 x 1 9/16 x 5 7/8 in.)



Replacement chain links + rivets

1 bag, for 28 mm (1 1/8 in.) chain width, large pitch



Guide support stand FG 150

for mortising depth to 140 mm



Chain bars

28 x 35 x 100 mm (1 1/8 x 1 3/8 x 3 5/16 in.)



Chain bars

28 x 1 1/2" x 150 mm (1 1/8 x 1 1/2 x 5 7/8 in.)



Chain bars

28 x 2" x 150 mm (1 1/8 x 2 x 5 7/8 in.)



Sprocket

pitch 22.6, 4 teeth, for set 28 x 35/40 x 100 mm/150 mm (1 1/8 x 1 9/16 x 3 15/16 / 5 7/8 in.)



Mortising chain

28 x 2" x 150 mm (1 1/8 x 2 x 5 7/8 in.)

contact

MAFELL AG

Beffendorfer Straße 4
D-78727 Oberndorf / Neckar
Germany

Tel.: +49 7423 / 812-114
Fax: +49 7423 812-102
Email: export@mafell.de