

Drilling station BST 460

ref.no.: 961211

EAN: 4032689155906




Technical data

Max. tool diameter at 0°	5 1/8 Inch
Drill guide clamping range	5/16 - 1 3/16 Inch
Collar diameter	1 11/16 Inch
Max. drill length	18 1/8 Inch
Max. drilling depth	11 13/16 Inch
Weight	10.6 lbs


Examples for usage



The parallel fence, typically used for end grain drilling, is an ideal accessory to the face edge stop for series production purposes.

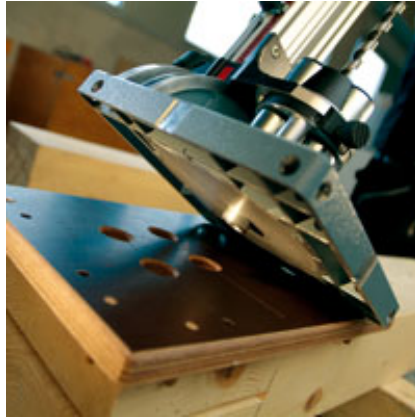

For series drilling and hole patterns, the insertion plate can be replaced by a copying insert. Ideal when working with drilling templates.

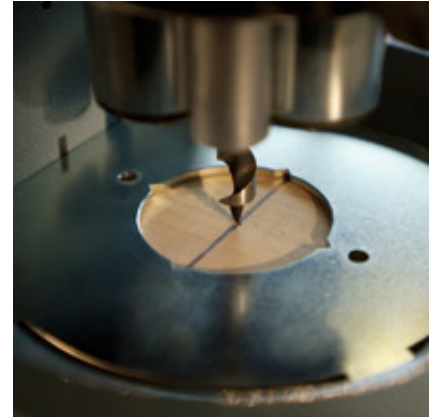

Notches to facilitate marking enable you to position the drill with great accuracy. Even when working at an angle, the drill tip always serves as the pivot axis.



The tensile force exerted by the polyethylene cable can be individually adjusted.

Applications

- ▶ Precision and series drilling
- ▶ Compatible materials include solid wood and laminated beams

Advantages

- ▶ The 80 mm high drill guide comprises six vertically located rollers with an iris-like adjusting mechanism. They enclose the bit without any backlash and thus provide perfect guidance. This arrangement prevents the bit from drifting.
- ▶ The tensile force exerted by the polyethylene cable can be individually adjusted, for example, in order to reduce the feed pressure when working horizontally. Once the hole has been drilled, the machine automatically returns to the starting position.

Description

MAFELL's drilling station not only offers supreme precision, compared with conventional drill jigs, but is also comprehensively revolutionizing drilling operations in solid wood. Its clever design, based on a rugged and lightweight aluminium column, cannot fail to impress.

The single column offers significant benefits: better view of the mark and drill tip, more space for bit changes, and the jamming that can occur during drilling is a thing of the past.

MAFELL is further demonstrating its ability to originate professional solutions, down to the last detail, and its understanding of practical needs. The continuously adjustable drill guide, with six locating elements, enables the drilling station to achieve unprecedented accuracy. As you would expect from MAFELL, the new drilling station is built exclusively from very high-quality materials, so that a long service life is assured.

Accessories / Tools



Parallel guide fence
with face edge stop



Copying insert
24,8 / 18 mm



Drilling machine retainer
Ø 57 mm



Special drill bit for copying insert for
BST 650 S, BST 460 S, BST 460, BST
320
Ø 25 mm, total length 320 mm, for creating
individual drilling templates



Lewis auger bit with hexagonal shank
Ø 8 mm (5/16 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 10 mm (3/8 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 12 mm (1/2 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 14 mm (9/16 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 16 mm (5/8 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 18 mm (1 1/16 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 20 mm (13/16 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 22 mm (7/8 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 24 mm (15/16 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 26 mm (1 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 28 mm (1 1/8 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 30 mm (1 3/16 in.), total length 460 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 6 mm (1/4 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 7 mm (1/4 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 8 mm (5/16 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 9 mm (3/8 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 10 mm (3/8 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 12 mm (1/2 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 14 mm (9/16 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 16 mm (5/8 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 18 mm (1 1/16 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 20 mm (13/16 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 22 mm (7/8 in.), total length 320 mm (18 1/8 in.)



Lewis auger bit with hexagonal shank
Ø 24 mm (15/16 in.), total length 320 mm (18 1/8 in.)

Lewis auger bit with hexagonal shank
Ø 26 mm (1 in.), total length 320 mm (18 1/8 in.)

Lewis auger bit with hexagonal shank
Ø 28 mm (1 1/8 in.), total length 320 mm (18 1/8 in.)



in.)



Lewis auger bit with hexagonal shank
Ø 30 mm (1 3/16 in.), total length 320 mm (18
1/8 in.)



Case with auger bits 460
6 pieces Lewis auger bits Ø 8, 10, 12, 14, 16, 18
mm

contact

MAFELL AG

Beffendorfer Straße 4
D-78727 Oberndorf / Neckar
Germany

Tel.: +49 7423 / 812-114
Fax: +49 7423 812-102
Email: export@mafell.de